

PSM05A

SOUNDKING AUDIO
com soundking www
SOUNDKING.

SOUNDKING.



(RMS): 125 6
150 6
5

LINE1/LINE 2 : -58 dBu 2 dBu

: -35 dBu 2 dBu

LINE3 (RCA) -10dBu 2 dBu

MAIN : 0dBu 2 dBu,

: 0dBu 2 dBu

(.
20 -20) +/- 3

(+48)

20 dBu

20

+30

20

12 +15dB /-3dB

2,5 +15dB /-3dB

100 +15dB /-3dB

THRU

XLR MIC/LINE

MAIN IN

XLR/1/4" TRS

. : 114 1

: 80 -14 (-10) ; 100 -10 (-3)


100 - 240 . (3,15A 250)

180

()

345*230*300

2,8

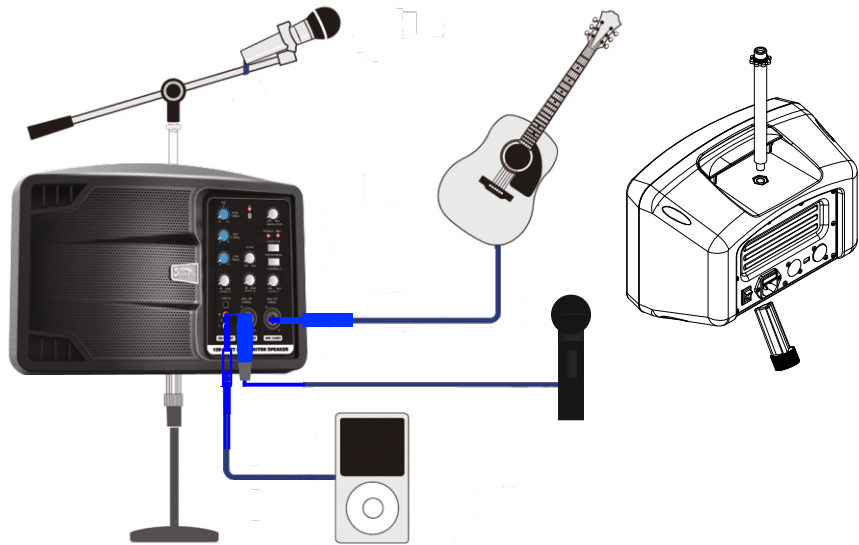


ON:
OFF:

1

2


MAIN LEVEL LEVEL

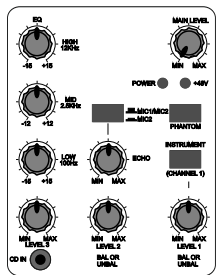

3

4

5

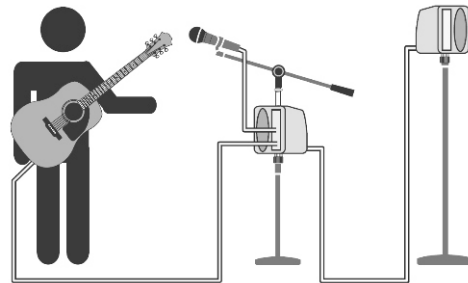

6

7

8


9

10

LEVEL


HIGH/MID/LOW

MAIN LEVEL




4

150-WATT PA / MONITOR SPEAKER

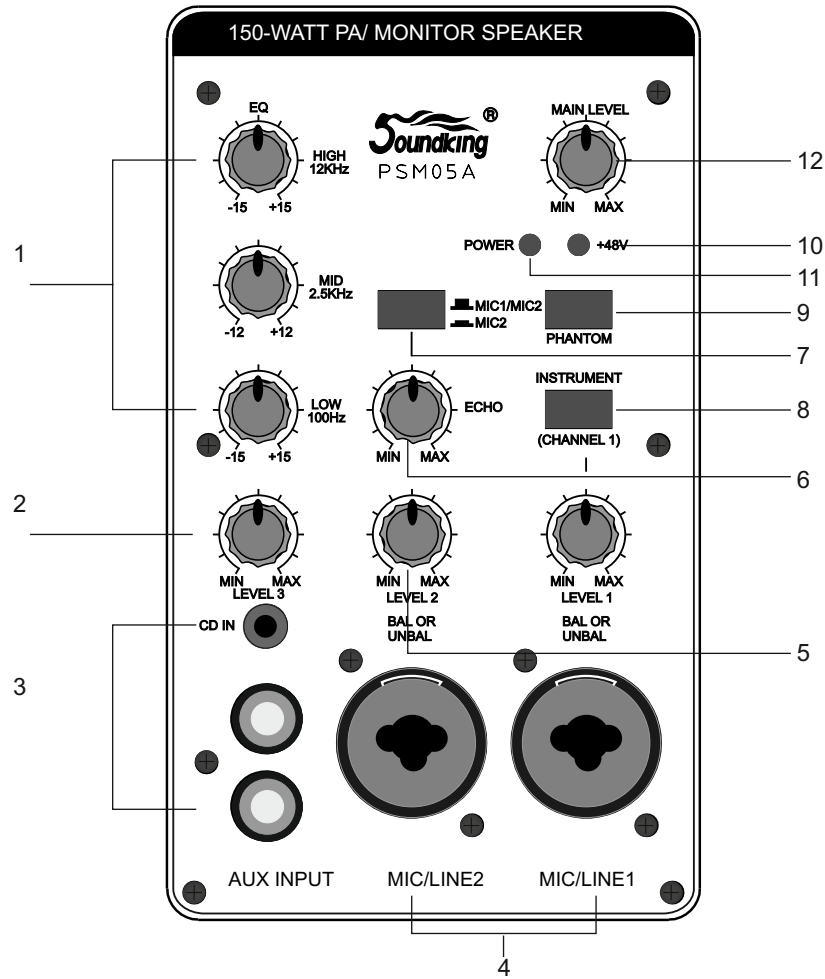

1. : +/- 15
2. Line 3 RCA CD IN
3. Aux CD MP3
4. MIC/LINE:(CH1/CH2) XLR-
5. LEVEL 1&2: (MIC/LINE).
6. ECHO:
7. MIC1/MIC2: CH1/CH2
8. INSTRUMENT: CH2. MIC/LINE1, 1/4" ST
9. PHANTOM: (+48)
10. POWER
11. MAIN LEVEL
- 12.

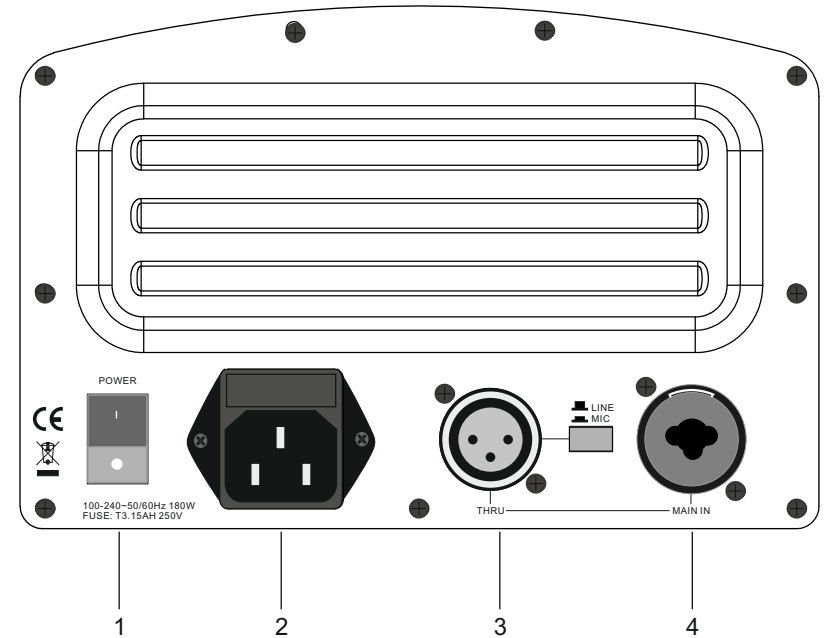

1. /
- 2.
3. THRU: XLR() THRU MAIN IN.
4. LEVEL: THRU.
5. MAIN IN: XLR() 1/4"TRS